


Switch jumper for power supply

Part No.: **JX-20** (100pcs/pack)

- By inserting the switch jumper socket (JX-20-SC) described below, the power supply circuit can be turned on.
- Material Resin part: PPS black (UL94V-0)
Pin part: Copper
- Finish: Gold plating over nickel base
- Rated current: 20A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 40 to + 125°C

■ Part No.: JX-20

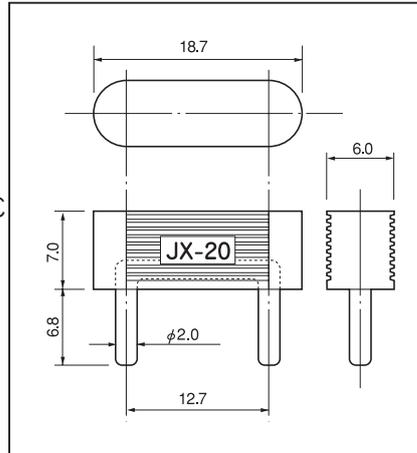

■ Example of usage



Combination of JX-20 and JX-20-SC


Socket for switch jumper for power supply

Part No.: **JX-20-SC**

- By inserting JX-20 described above, the power supply circuit can be turned on.
- Two types (separate type and taping type) are available.
- Material Resin part: PPS black (UL94V-0)
Pin part: Body: Brass
Contact: Beryllium copper
- Finish Body: Tin plating over nickel base
Contact: Gold plating over nickel base
- Rated current: 20A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 40 to + 125°C
- Adaptive male pin diameter: ϕ 1.7 to ϕ 2.1

■ Part No.

Part No.	Package
JX-20-SC	Bulk (100pcs/pack)
JX-20-SC-T	Taping (500pcs/reel)

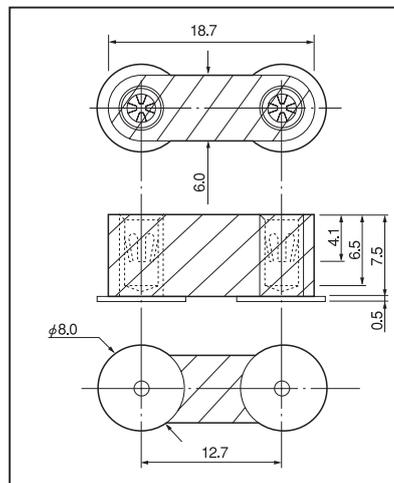

■ Example of usage



Combination of JX-20-SC and JX-20

■ Dimension of the reel

