



Connected jumper socket

Part No.: **JSW-1** (10pcs/pack)

- By combining with WLW-1, WLT-1 or HWW-20PW, switching of up to 20 circuits is available.
- We will cut to the desired number of poles before delivery.
- Material Contact part: Phosphor bronze
Resin part: PBT black (UL94V-0)
- Finish Contact part: (Touching part) Gold plating over nickel base
(Other) Nickel plating
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20m Ω or less
- Adaptive male pin diameter: $\varnothing 0.64$
- Insertion / Removal forces: 70g or over
- Insertion / Removal durability : 100 cycles
- Operating temperature range: - 40 to + 125°C

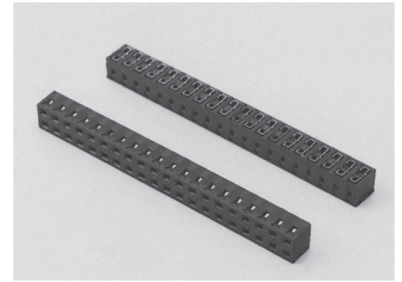


■ **Example of usage**

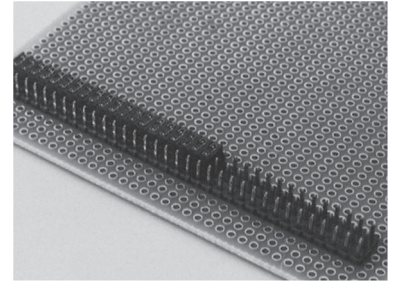


Combination of JSW-1 and WLT-1

■ **How to order**

JSW-1-5P

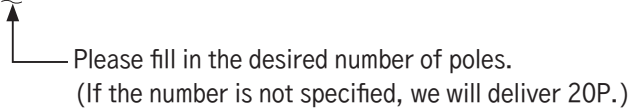

* We can receive order for 2P or more.
[If you order 1P, please use JS-1]

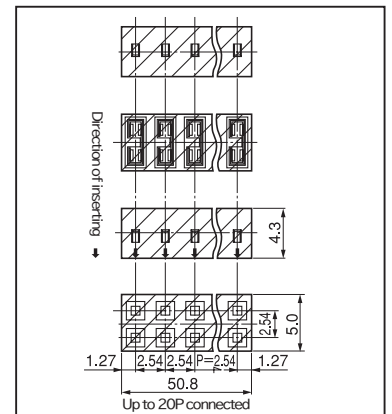

Tool for pulling out connected jumper socket

Part No.: **JSWJ-01** (1pc/pack)

Tool

- When using JSW-1 with many poles, large force is required to pull it out. If it is difficult to pull it out, please use the tool for pulling out.

■ **How to use**

Put the JSWJ-01 over JSW-1 and shake it side by side to pull out.

■ **How to order**

Part No.: JSWJ-01



■ **Example of usage**

