

For electric wire installation

Part No.: **PN-8-1-A** (10pcs/pack)

- Electric wire can be fit to this type of terminal for panel.
- Six colors, BLACK, RED, YELLOW, GREEN, BLUE and WHITE, are available.
- Material Pin part: Brass
Resin part: PPO (UL94V-1)
- Finish Pin part: Nickel plating
- Resin color: BLACK, RED, YELLOW, GREEN, BLUE, WHITE
- Rated current: 5A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 40 to + 125°C
- Board thickness to which a panel can be fit: 0.5 mm to 5.0 mm
- Panel fitting hole diameter: ϕ 6.0


■ **How to order**

PN-8-1-A RED



↑ Please specify the resin color.
(BLACK, RED, YELLOW, GREEN, BLUE, WHITE)

■ **Instructions for use**

- Please use with the tightening torque of 3kgf-cm (29.4 N-cm) or less when fitting.

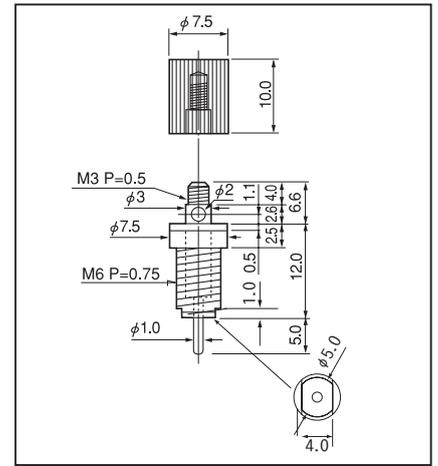

■ **Example of usage**

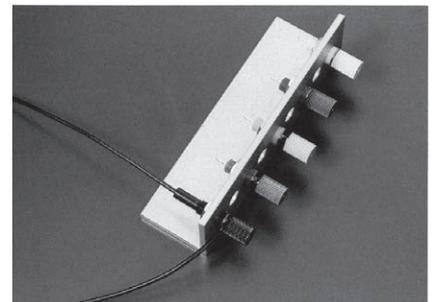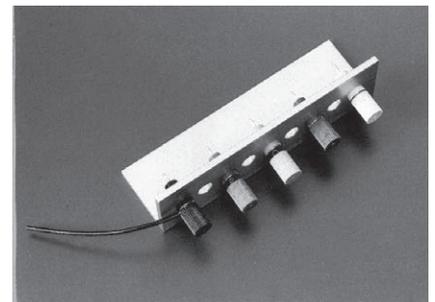

When OR-5-3-50 (with electric wire) is used for on the female side

★ The conventional type has no part for holding when tightening a nut. Therefore, a part for using spanners is added this time at the back edge to fix with spanners. (Part No.: PN-8-1-A)