



Alternate jumper socket

Part No.: **JSJ-1** (100pcs/pack)


- By installing to the wrapping terminals (□0.64, □0.635) which the pitch is 2.54mm, alternate short circuit is available.



- Material Resin part: PBT green (UL94V-0)
Socket part: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 125V AC, DC
- Insulation resistance: 500M Ω or over
- Withstand voltage: 700V AC, DC per minute
- Contact resistance: 20m Ω or less
- Insertion / Removal forces: 300g or over
- Adaptive male pin diameter: □0.64, □0.635, 2.54mm pitch
- Adaptive male part number: WL series
 WLW series
 WLT series
 WLA series
 HWP-3P series
 HWHP-3P series
 HWP series
 HWRP series
 HWW series
 HWWH series
- Operating temperature range: - 40 to + 125°C

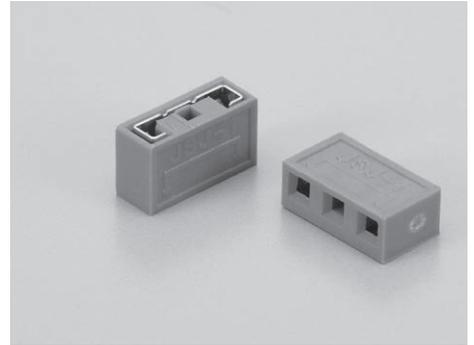


■ Example of usage

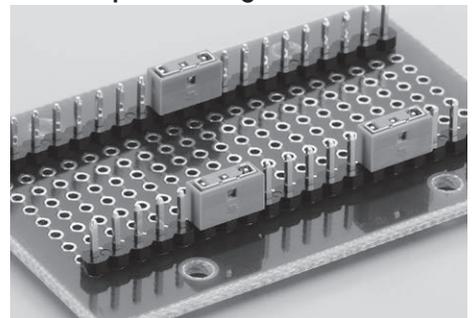



Combination of JSJ-1 and WL-1

■ How to order:
JSJ-1

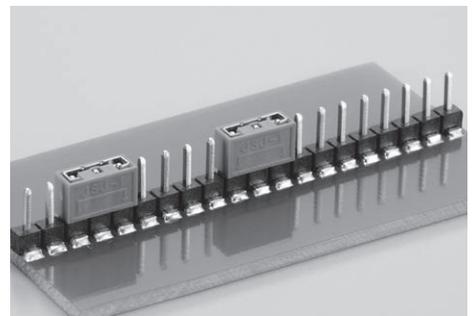

Combination of JSJ-1 and HWP-20P-G

■ Dimension

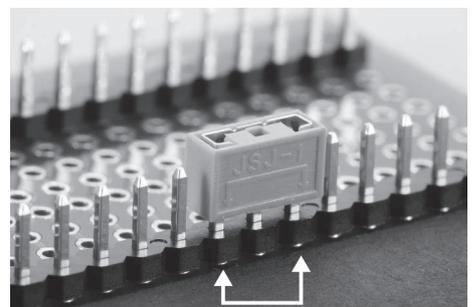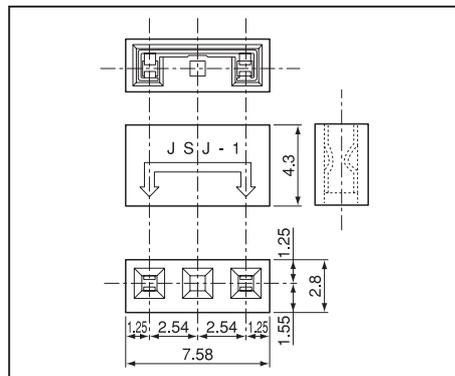

The parts specified by arrows are short-circuited.