


**For insertion / removal of two-tiered type**

**SX series (1000pcs/pack)**


- This is used for mounting PC boards by two-tiered installation.
- Material: Brass
- Finish: Gold plating over nickel base
- Rated current : 2A
- Adaptive socket pin: PD-6, PD-60, PM-6, PM-60

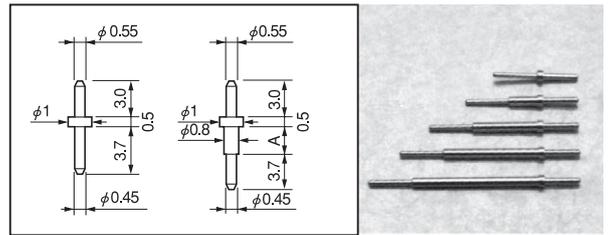

SX-001

SX-002 to 005

Part No.	A	H	Printed board fitting hole diameter
SX-001	0	4.7	φ 0.6
SX-002	2.3	7.0	φ 0.6
SX-003	5.3	10.0	φ 0.6
SX-004	7.8	12.5	φ 0.6
SX-005	10.3	15.0	φ 0.6

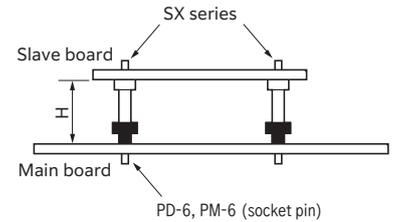


\* The dimension H indicates the distance between the main board and the slave board when PD-6 or PM-6 used.

**For insertion / removal of two-tiered type (Pitch: 1.778mm)**

**SY series (10pcs/pack)**

- This is used for mounting PC boards with a pitch of 1.778mm by two-tiered installation.
- Pitch: 1.778mm, 21 pins connected
- Please cut it to the desired number of poles by using a mold cutting nipper (Part No.: MOC-3).
- Material Pin: Brass, Finish: Gold plating over nickel base  
Resin: PBT black (UL94V-0)
- Rated current : 2A
- Insulation resistance : 500M Ω or over
- Withstand voltage : 700V AC,DC per minute
- Operating temperature range: - 40 to + 125℃
- Adaptive socket: PD-6, PD-60, PM-6, PM-60

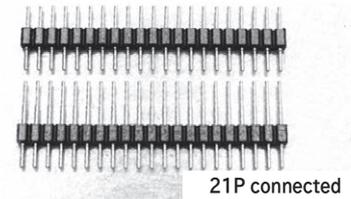

Part No.	A	B	H	Printed board fitting hole diameter
SY-002	0.45	0	7.2	φ 0.6
SY-003	0.6	2.8	10.0	φ 0.6
SY-004	0.6	5.3	12.5	φ 0.6
SY-005	0.6	7.8	15.0	φ 0.6
SY-006	0.6	12.8	20.0	φ 0.6

\* The dimension H indicates the distance between the main board and the slave board when PD-6 or PM-6 used.

**Example of usage**

