




Bidirectional relay socket


RR series (10pcs/pack)

- By inserting the male pin from the both directions, this can perform relay.
- Six colors for resin, BLACK, RED, YELLOW, GREEN, BLUE and WHITE, are available.
- Material Pin part: Brass
 Contact part: Beryllium copper
 Resin part: Acetal copolymer (UL94HB)
 Color: BLACK, RED, YELLOW, GREEN, BLUE, WHITE
- Finish Pin part: Gold plating over nickel base
 Contact part: Gold plating over nickel base
- Rated current: 1A (RR-2-1)
 5A (RR-3-1)
- Withstand voltage: 1000V AC, DC per minute
- Contact resistance: 10m Ω or less
- Insertion / removal durability : 100 cycles
- Insertion / removal forces: 70g or over (RR-2-1)
 : 150g or over (RR-3-1)
- Adaptive male pin diameter: φ 0.45 to φ 0.6 (RR-2-1)
 φ 0.8 to φ 1.0 (RR-3-1)
- Operating temperature range: - 40 to + 85°C

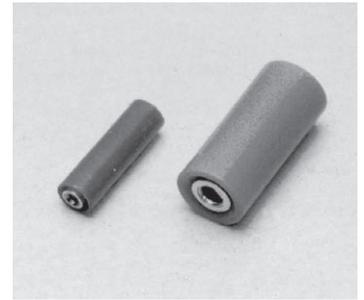


■ Part No.

Part No.	Adaptive male pin
RR-2-1	OP-1 series
RR-3-1	HJ-31 series

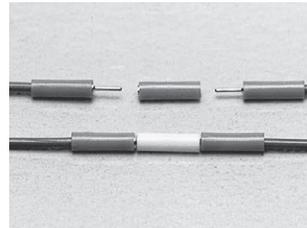

OP-1 series and RR-2-1

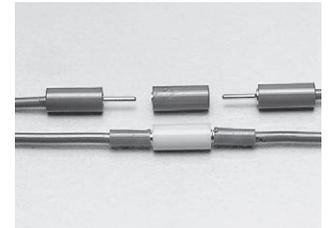

HJ-31 series and RR-3-1