
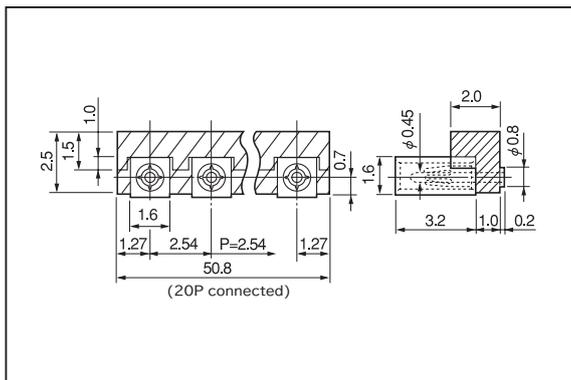




Connector for surface mounting (connected type)

HH-20 series (10pcs/pack)

- This is the 20P connected type with the connector HH-1 series for surface mounting fit to the carrier.
- This is arranged with a pitch of 2.54 mm.
(Please cut to the desired number of poles and use.)
- After soldering, please remove the carrier.
- Reflow can be used for this type.
- Material
 - Carrier part: Resin part: PCT resin black (UL94V-0)
 - Pin part: Phosphor bronze, Finish: Gold plating over nickel base
 - Socket part: Please refer to HH-1 series.

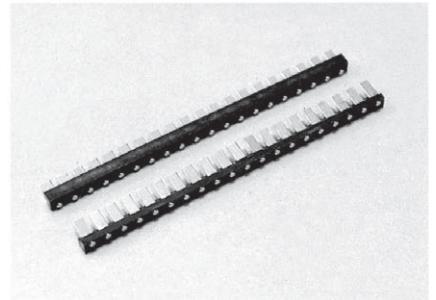

Example of usage

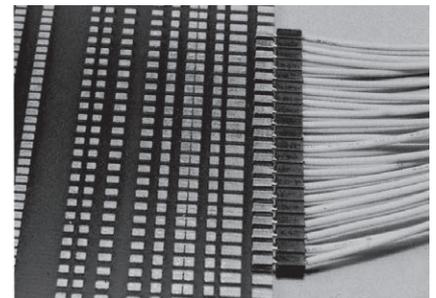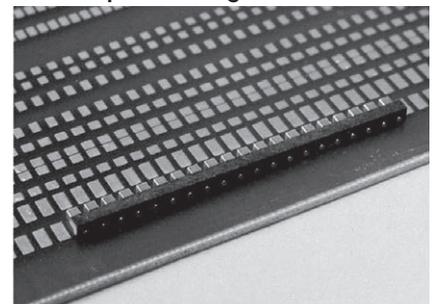


When male pins are used

Part No.


Part No.	Finish
HH-20-G	Gold plating
HH-20-S	Tin plating

Recommended land information

- For horizontal fitting



- For vertical fitting



* Please set the land edge to 0.7 mm or less from the PC board edge.
(Housing OH series is used as the male pin.)

Instructions for mounting

When a long type is used, it may be bent during reflow. Please hold the both sides with a masking tape.