
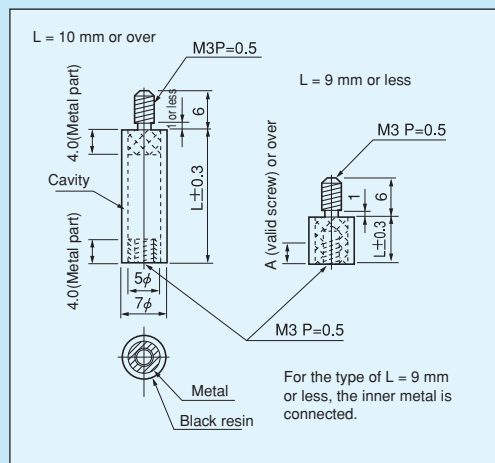


Spacer of metal resin type for printed board [AP, AQ series] (100pcs/pack)

- The strength of this spacer is increased by filling metal in the resin.
- For the type of 10 mm or over, the upper part and the lower part are electrically insulated.
- For the type of 9 mm or less, they are electrically connected.
- Material Resin part: PBT black (UL94V-0)
Metal part: Brass
- Finish: Nickel plating
- Operating temperature range: -40 to +125°C

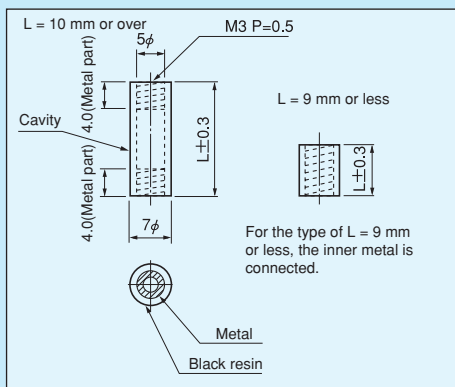

AP type (for M3)

Part number	L (mm)
AP- 4	4
AP- 5	5
AP- 6	6
AP- 7	7
AP- 8	8
AP- 9	9
AP-10	10
AP-11	11
AP-12	12
AP-13	13
AP-14	14
AP-15	15
AP-16	16
AP-17	17
AP-18	18
AP-19	19
AP-20	20
AP-25	25
AP-30	30
AP-35	35
AP-40	40
AP-45	45
AP-50	50

AQ type (for M3)

Part number	L (mm)	A (or over)
AQ- 4	4	2.5
AQ- 5	5	3
AQ- 6	6	4
AQ- 7	7	4
AQ- 8	8	4
AQ- 9	9	4
AQ-10	10	
AQ-11	11	
AQ-12	12	
AQ-13	13	
AQ-14	14	
AQ-15	15	
AQ-16	16	
AQ-17	17	
AQ-18	18	
AQ-19	19	
AQ-20	20	
AQ-25	25	
AQ-30	30	
AQ-35	35	
AQ-40	40	
AQ-45	45	
AQ-50	50	