

**Wrapping terminal for surface mounting (three-row connected type) [HWT, HWTS series] (10pcs/pack)**

- This wrapping terminal can stand on a surface mounting board.
- Three rows are connected with a pitch of 2.54 mm. (Max. 20PT connected)
- By inserting / pulling out the jumper socket for three circuits [3JS-1], this terminal can be used as a substitute for a switch.
- Two types, one with a placement pin on both sides and one without placement pins, are available.
- Reflow can be used for this type.
- Material

SMT pin part: Brass


Placement pin part: Phosphor bronze

Resin part: PPS black (UL94V-0)


- Rated current: 3A
- Insulation resistance: 500MΩ or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: -40 to +125°C

**Part number**

Part number	Finish	Placement pin
HWT-20PT-G	Gold plating over nickel base	Without
HWT-20PT-S	Tin plating over nickel base	Without
HWTS-20PT-G	Gold plating over nickel base	With
HWTS-20PT-S	Tin plating over nickel base	With

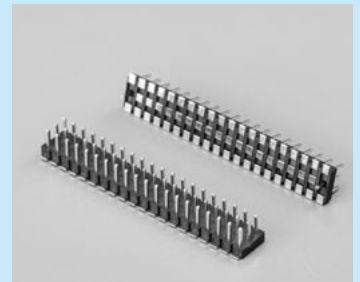


**Example of usage**

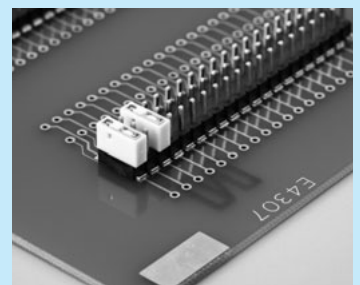


HWT and 3JS-1


**Dimension**

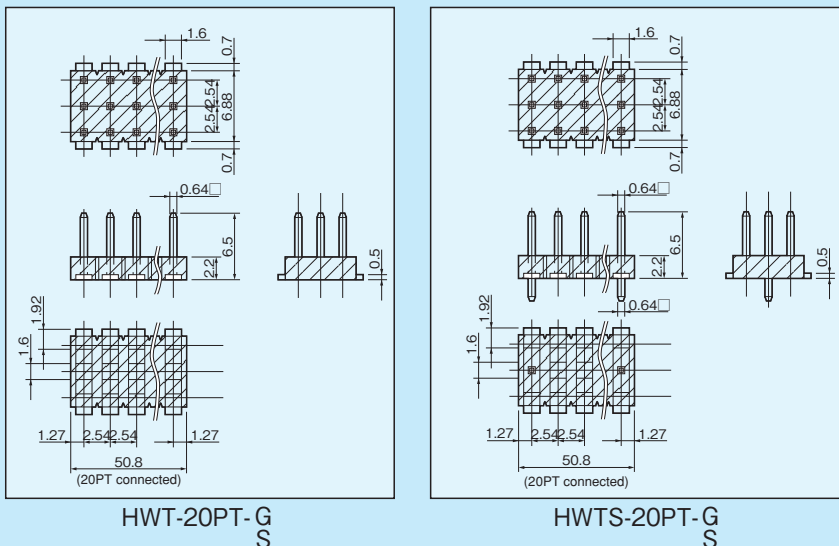

**Recommended land diameter**

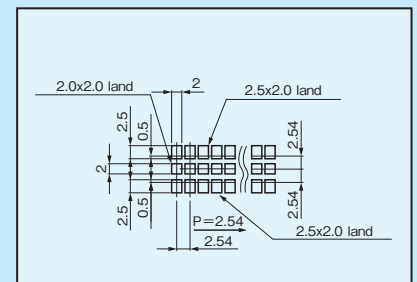

HWT series

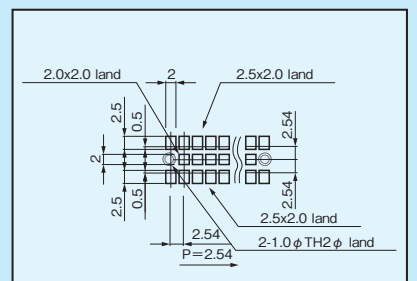

HWTS series

**How to order**

HWT-10PT-G

G: Gold plating  
S: Tin plating

Please fill in the number of poles on one side.  
(In this case, the total number of pins is 30P.)  
Please use HWP-3P as HWT-1PT.

For surface mounting