



Wrapping terminal for surface mounting (three-row connected type)

HWT, HWTS series (10pcs/pack)

- This wrapping terminal can stand on a surface mounting board.
- Three rows are connected with a pitch of 2.54 mm. (Max. 20PT connected)
- By inserting / pulling out the jumper socket for three circuits [3JS-1], this terminal can be used as a substitute for a switch.
- Two types (one with a placement pin on both sides and one without placement pins) are available.
- Reflow can be used for this type.
- Material
 - SMT pin part: Brass
 - Placement pin part: Phosphor bronze
 - Resin part: PPS black (UL94V-0)
- Rated current: 3A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 40 to + 125°C

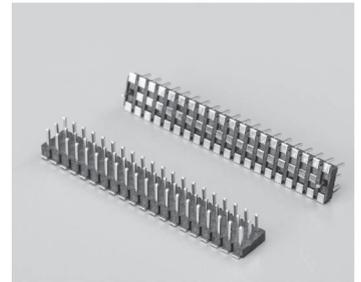

■ Example of usage

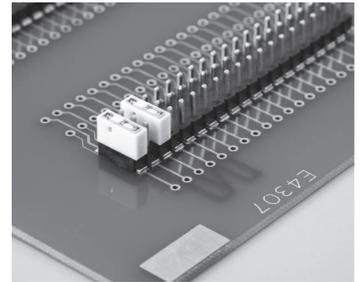


HWT and 3JS-1



■ Part No.

Part No.	Finish	Placement pin
HWT-20PT-G	Gold plating over nickel base	Without
HWT-20PT-S	Tin plating over nickel base	Without
HWTS-20PT-G	Gold plating over nickel base	With
HWTS-20PT-S	Tin plating over nickel base	With

■ Dimension

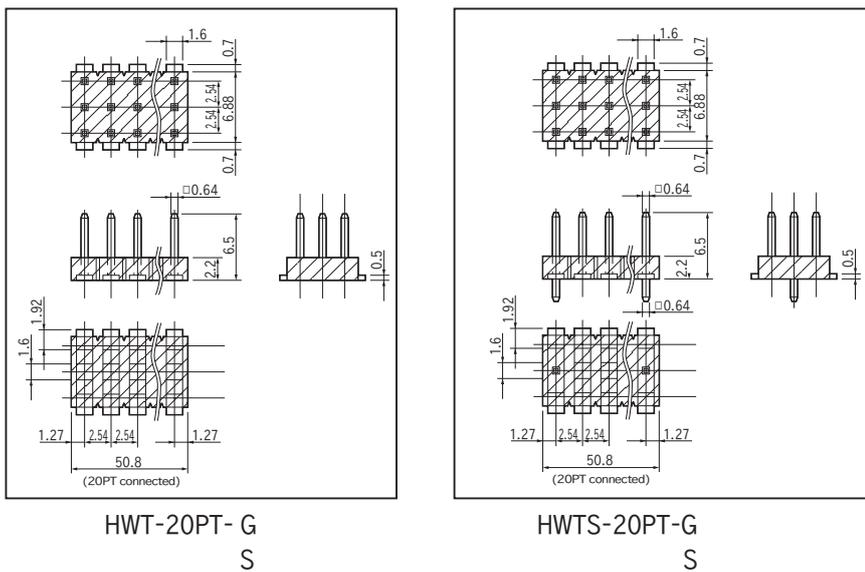


■ Recommended land information

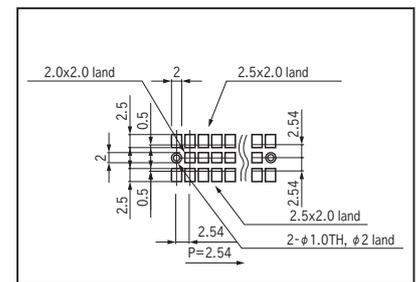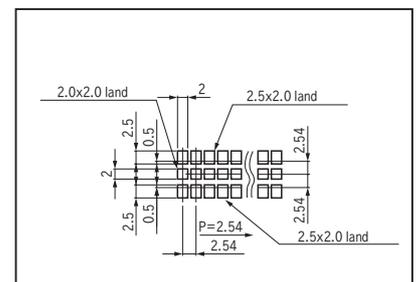

■ How to order

HWT-10PT-G



G : Gold plating
S : Tin plating

Please fill in the number of poles on one side.
(In this case, the total number of pins is 30P.)
Please use HWP-3P as HWT-1PT.