

### Jack for $\phi 2$

Part No.: **JK-2** (10pcs/pack)


- Plug for  $\phi 2$  can be inserted to this type of jack from the horizontal direction.
- JM-2 described below is adaptive for this type.
- This is used for checking of signal line, etc.
- Seven resin colors: BLACK, RED, YELLOW, GREEN, BLUE, GRAY, WHITE
- Material Resin part: PPE (UL94V-1)  
Contact part: Phosphor bronze
- Finish: Silver plating over copper base
- Rated current: 5A
- Adaptive male pin diameter:  $\phi 2$
- Operating temperature range:  $-40$  to  $+85^{\circ}\text{C}$

#### How to order



JK-2 WHITE

Please specify the color.  
(BLACK, RED, YELLOW, GREEN, BLUE, GRAY, WHITE)


#### Dimension

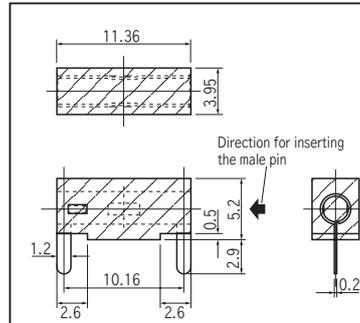

#### Recommended land information

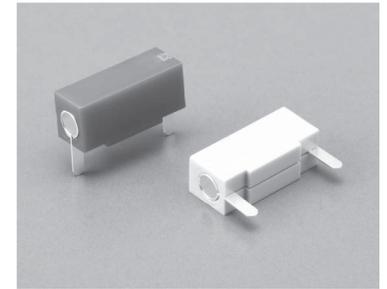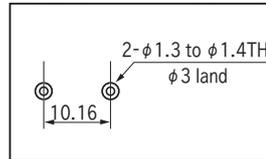

#### Example of usage

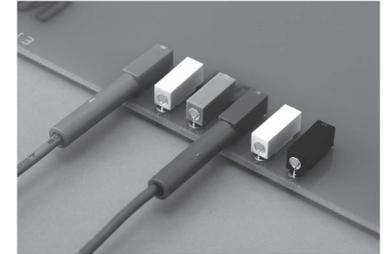

### Plug for $\phi 2$

Part No.: **JM-2** (10pcs/pack)


- This plug is for  $\phi 2$ .
- This is adaptive for JK-2 described above.
- Seven resin colors: BLACK, RED, YELLOW, GREEN, BLUE, GRAY, WHITE
- Material Resin part: PPE (UL94V-1)  
Metal part: Brass
- Finish: Nickel plating
- Rated current: 5A
- Electric wire diameter to use: Thinner than AWG16
- Operating temperature range:  $-40$  to  $+85^{\circ}\text{C}$
- Please solder the electric wire.

#### How to order

JM-2 RED

Please specify the color.  
(BLACK, RED, YELLOW, GREEN, BLUE, GRAY, WHITE)

#### Dimension

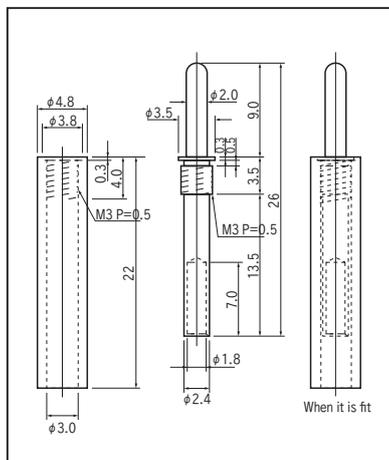

### Terminal for front panel check

Part No.: **PH-1** (1000pcs/pack)

- This is used for adjusting a PC board stored in a rack, etc. by hooking an oscilloscope probe or a tester lead from the front side.
- Material: Brass
- Finish: Gold plating over nickel base
- Printed board fitting hole diameter:  $\phi 2.0$

