
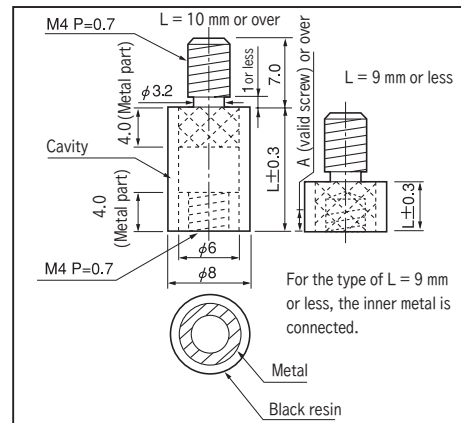


**Spacer of metal resin type for printed board**

**4AP, 4AQ series (100pcs/pack)**

- The strength of this spacer is increased by filling metal in the resin.
- For the type of 10 mm or over, the upper part and the lower part are electrically insulated.
- For the type of 9 mm or less, they are electrically connected.
- Material Resin part: PBT black (UL94V-0)  
Metal part: Brass
- Finish: Nickel plating
- Operating temperature range: - 40 to + 125°C

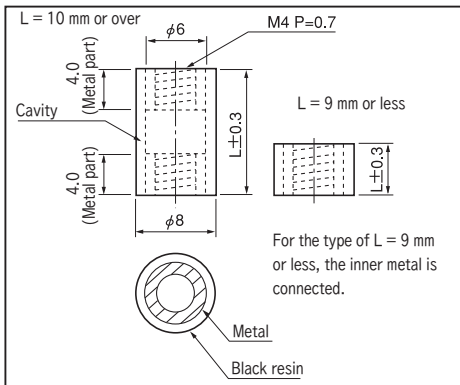

■ **4AP type (for M4)**

Part No.	L
4AP-4	4
4AP-5	5
4AP-6	6
4AP-7	7
4AP-8	8
4AP-9	9
4AP-10	10
4AP-11	11
4AP-12	12
4AP-13	13
4AP-14	14
4AP-15	15
4AP-16	16
4AP-17	17
4AP-18	18
4AP-19	19
4AP-20	20
4AP-25	25
4AP-30	30
4AP-35	35
4AP-40	40
4AP-45	45
4AP-50	50

■ **4AQ type (for M4)**

Part No.	L	A
4AQ-6	6	3
4AQ-7	7	4
4AQ-8	8	5
4AQ-9	9	5

4AQ-10	10
4AQ-11	11
4AQ-12	12
4AQ-13	13
4AQ-14	14
4AQ-15	15
4AQ-16	16
4AQ-17	17
4AQ-18	18
4AQ-19	19
4AQ-20	20
4AQ-25	25
4AQ-30	30
4AQ-35	35
4AQ-40	40
4AQ-45	45
4AQ-50	50