
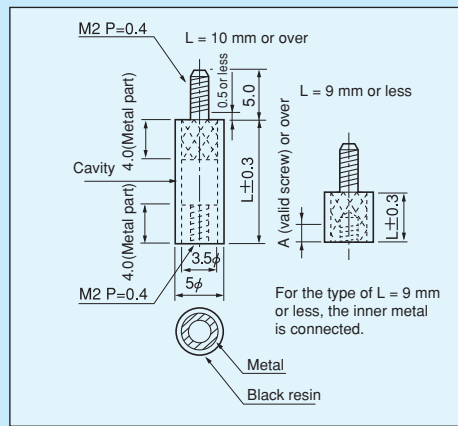


Spacer of metal resin type for printed board [2AP, 2AQ series] (100pcs/pack)

- The strength of this spacer is increased by filling metal in the resin.
- For the type of 10 mm or over, the upper part and the lower part are electrically insulated.
- For the type of 9 mm or less, the upper part and the lower part are electrically connected.
- Material Resin part: PBT black (UL94V-0)
Metal part: Brass
- Finish: Nickel plating
- Operating temperature range: -40 to +125°C

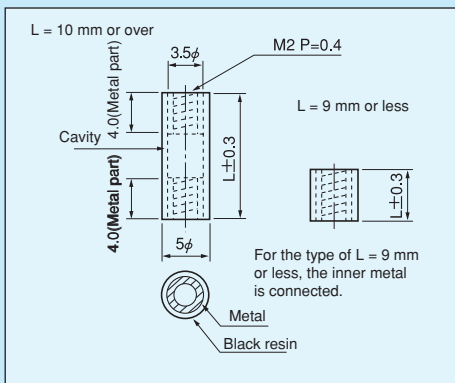

2AP type (for M2)

Part number	L (mm)
2AP- 3	3
2AP- 4	4
2AP- 5	5
2AP- 6	6
2AP- 7	7
2AP- 8	8
2AP- 9	9
2AP-10	10
2AP-11	11
2AP-12	12
2AP-13	13
2AP-14	14
2AP-15	15
2AP-16	16
2AP-17	17
2AP-18	18
2AP-19	19
2AP-20	20
2AP-25	25
2AP-30	30
2AP-35	35
2AP-40	40
2AP-45	45
2AP-50	50

2AQ type (for M2)

Part number	L (mm)	A (or over)
2AQ- 3	3	1.5
2AQ- 4	4	2.5
2AQ- 5	5	3
2AQ- 6	6	3
2AQ- 7	7	4
2AQ- 8	8	5
2AQ- 9	9	5
2AQ-10	10	
2AQ-11	11	
2AQ-12	12	
2AQ-13	13	
2AQ-14	14	
2AQ-15	15	
2AQ-16	16	
2AQ-17	17	
2AQ-18	18	
2AQ-19	19	
2AQ-20	20	
2AQ-25	25	
2AQ-30	30	
2AQ-35	35	
2AQ-40	40	
2AQ-45	45	
2AQ-50	50	