


45-degree LED spacer

Part No.: **LT-6** (100pcs/pack)

- This spacer is used for fitting an LED at 45 degrees.
- This is used for an LED with the head diameter of $\phi 3$ or $\phi 5$.
- Material: LCP resin (UL94V-0)
- Color: BLACK
- Reflow: Can be used.
- Operating temperature range: $- 40$ to $+ 125^{\circ}\text{C}$

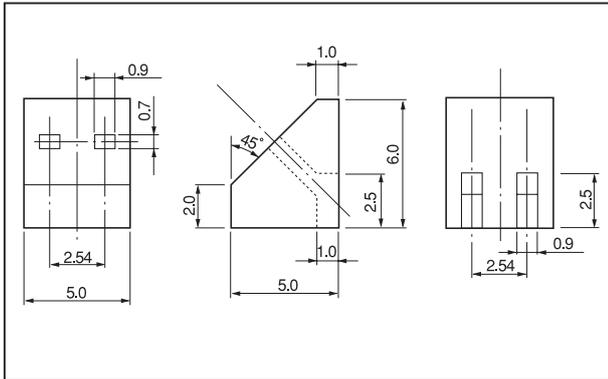


■ Part No.:

LT-6




■ Example of usage

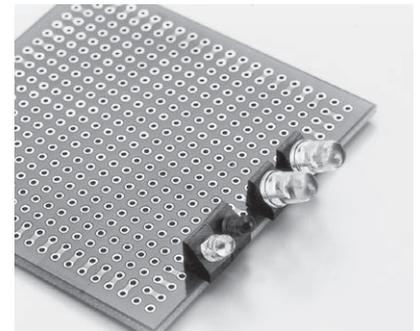

30-degree LED spacer

LT-6-30 Series (100pcs/pack)

- This spacer is used for fitting an LED at 30 degrees.
- This is used for an LED with the head diameter of $\phi 3$ or $\phi 5$.
- LT-6-30-1.5 is used for an LED with a stopper on the leg.
- Material: LCP resin (UL94V-0)
- Color: BLACK
- Reflow: Can be used.
- Operating temperature range: $- 40$ to $+ 125^{\circ}\text{C}$

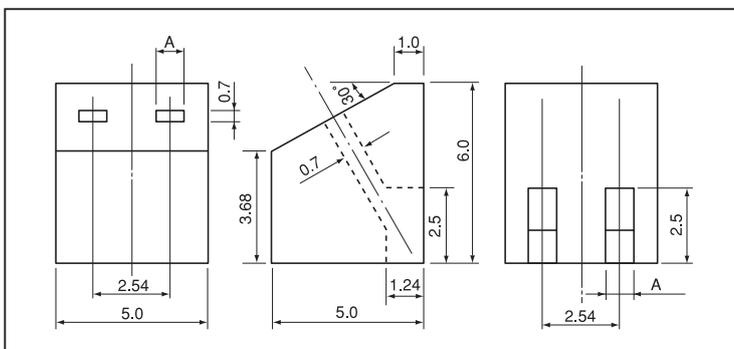

■ Part No.

Part No.	A
LT-6-30	0.9
LT-6-30-1.5	1.5



■ Example of usage

