



**Jack for surface mounting**

Part No.: **JH-2-A**

- A chip mouter can be used for this jack.
- The plug can be inserted from the vertical direction.
- This is adaptive for the plug of  $\phi 2.0$
- Plugs of OP-7-1, OP-7-2 and OP-7-2-100 (with electric wire) are available.
- Material Socket part: Phosphor bronze  
Resin part: Fluorine (UL94V-0)
- Finish: Gold plating over nickel base
- Resin color: BLACK, RED, YELLOW, GREEN, BLUE, WHITE
- Adaptive male pin diameter:  $\phi 2.0$
- Insertion forces: 800g or less
- Removal forces: 100g or over


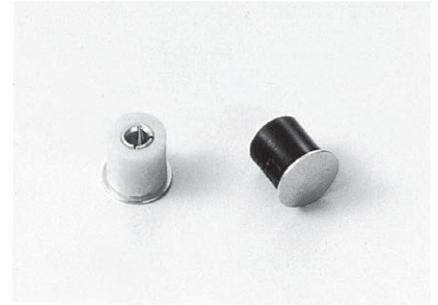


■ Example of usage

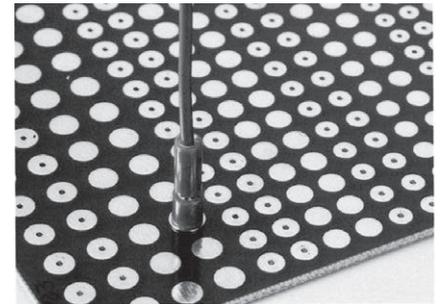

Combination of JH-2 and OP-7-2-100

■ Recommended land information

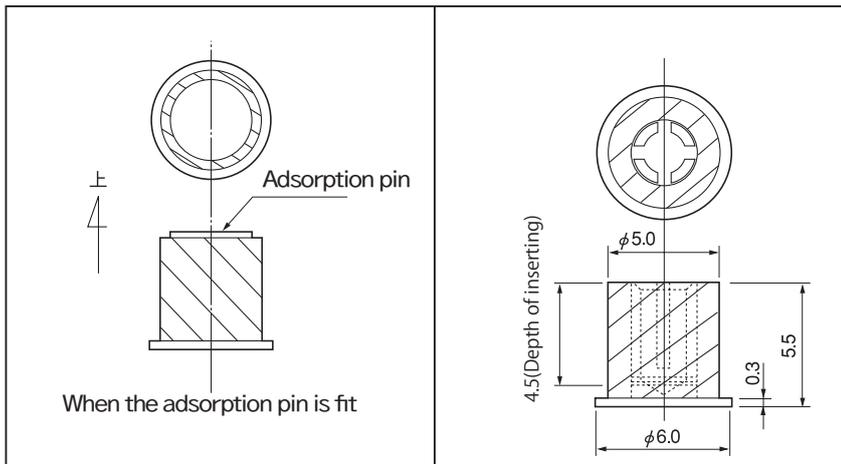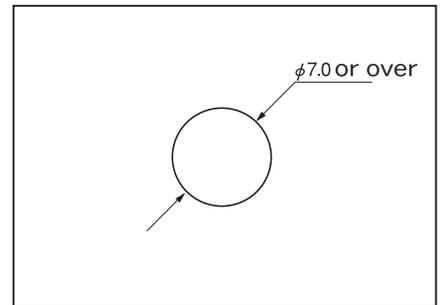

- Insertion / removal durability : 1000 cycles
- Rated current: 10A
- Contact resistance: 20m  $\Omega$  or less
- Insulation resistance: 1000M  $\Omega$  or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 55 to + 200°C

- Instructions for use  
As the adsorption pin is attached to the taping product, please pull out the adsorption pin after reflow prior to washing.

■ How to order

JH-2-A-T RED

- ↑ Please specify the resin color. (BLACK, RED, YELLOW, GREEN, BLUE, WHITE)
- ↑ T: Tape-and-reel (200 pcs/reel)
- ↑ B: Bulk (10 pcs/pack)

\* In order to increase the strength of the fluorine part, the conventional mold has been changed to the cutting type. (Part No.: JH-2-A) (The dimensions, etc. are same as those of the conventional one.)

