


Wiring clip for surface mounting [CZ series]

- Electric cable can be rotated to the side of POB.
- After reflow to the PCB, please place the cable into the clip.
- By making the clip narrower, it can be simplified.
- Material.....Brass
- Finish.....Tin plating over Ni base




Example of usage

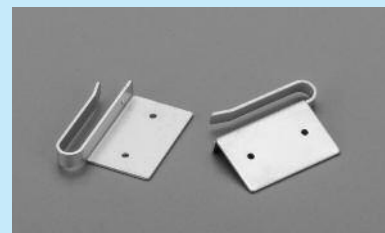


Part number	Package	Amount of storage for electric cable(reference)
CZ-2.0	Bulk (100pce/pack)	In case of trunking diameter : ϕ 1.5, 3 cable max In case of trunking diameter : ϕ 1.0, 5 cable max
CZ-2.0-T	Reel (600pcs/reel)	
CZ-3.0	Bulk (100pce/pack)	In case of trunking diameter : ϕ 2.5, 3 cable max In case of trunking diameter : ϕ 1.5, 5 cable max
CZ-3.0-T	Reel (400pcs/reel)	

Dimension

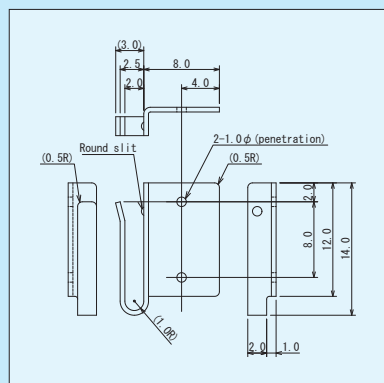


CZ-2.0

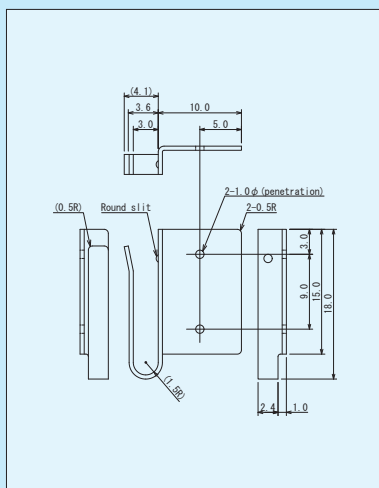


CZ-3.0

Recommended land

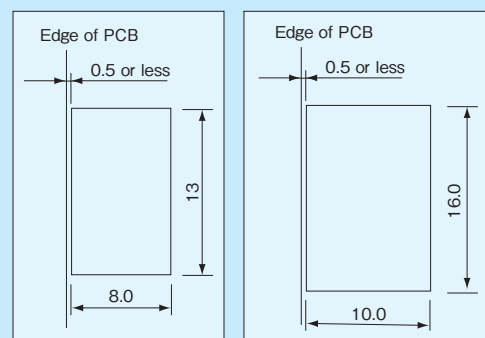


CZ-2.0-T

Reel dimension

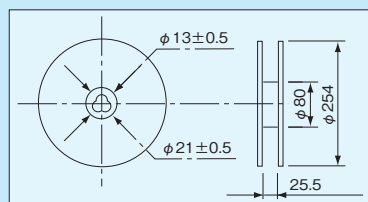


CZ-3.0-T


Reel dimension

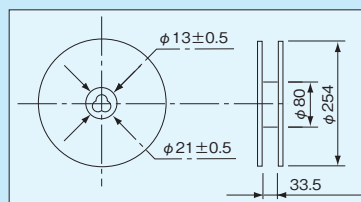

Tape dimension

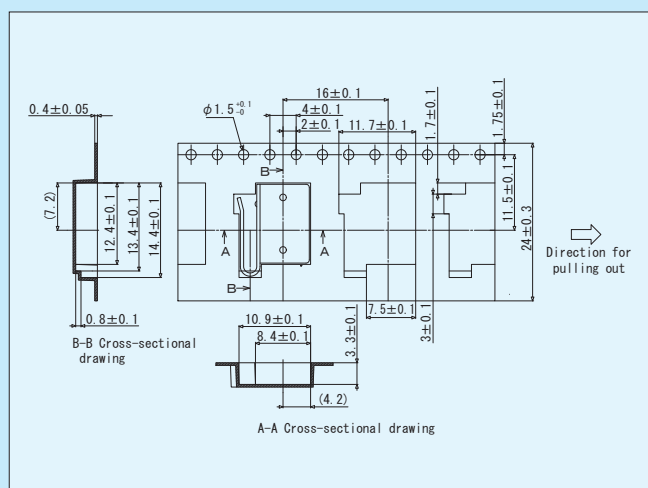

Tape dimension

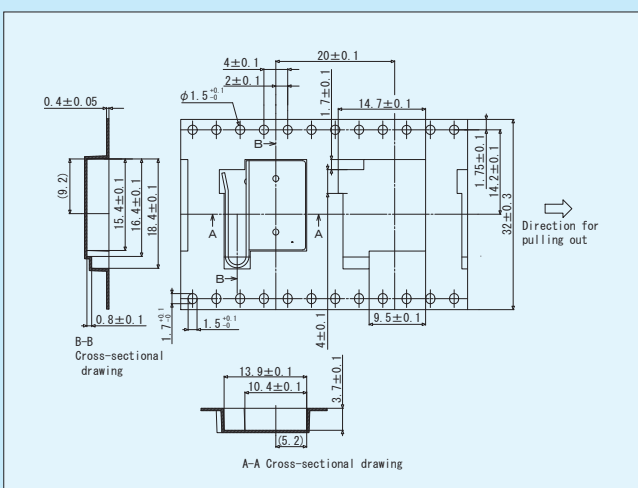

Wiring clip for surface mounting