

**Power supply socket for surface mounting**

Part No.: **PJ-2-7.5**

- This socket can supply power onto a surface mounting board.
- Tape-and-reel is also available for using a mounter.
- The male side is OP-7-1 and OP-7-2.
- When supplying the power for two-tiered PC boards, please use DX series.


● Material

Body: Brass  
Contact: Beryllium copper


● Finish

Body: Gold plating over nickel base  
Contact: Gold plating over nickel base

- Rated current: 20A
- Contact resistance: 10m Ω or less
- Insertion / removal forces : 150g or over
- Insertion / removal durability : 100 cycles
- Adaptive male pin diameter: φ 1.7 to φ 2.1
- Operating temperature range: - 40 to + 125°C

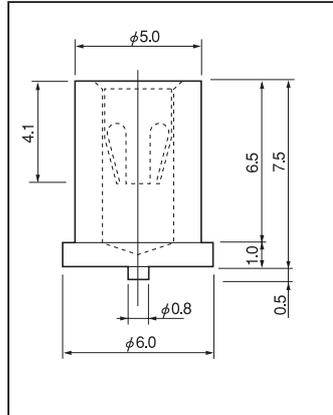

■ Example of usage

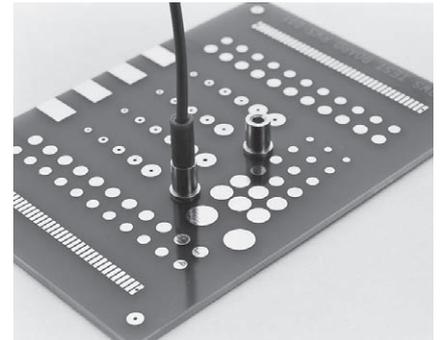



When combined with OP-7-1 / OP-7-2

■ Part No.


Part No.	Package
PJ-2-7.5	Bulk (100pcs/pack)
PJ-2-7.5-T	Reel (600pcs/reel)



■ Recommended land information

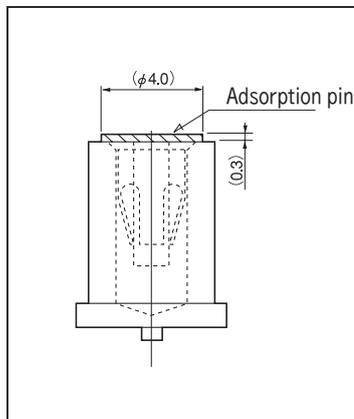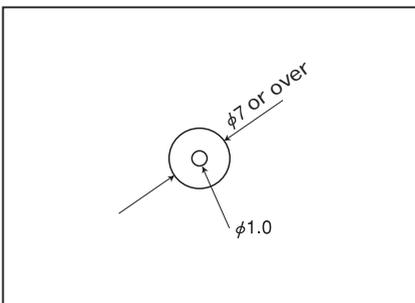

Adsorption pin is attached for the tape-and-reel. After soldering, please dispose it.

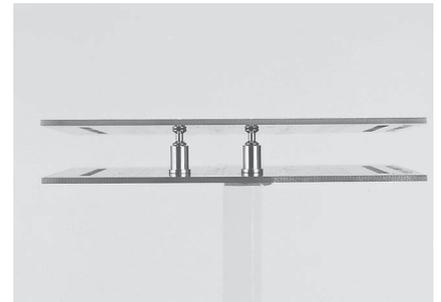

When combined with DX series

