


Grommet [HT series] (1000pcs/pack)

- This is used for repairing a PC board, etc.
- This can be also used for overlaying many thin thickness boards with such as flexible board, etc.
- Material: Brass
- Finish: Gold plating over nickel base



For grommet

Part number	A	B	C	D	Adaptive printed board thickness (mm)	Printed board fitting hole diameter (mm) (φ)	Caulking tool A	Caulking tool B	Caulking tool C
HT-0-1	1.8	1.3	0.95	0.7	0.3~0.7	1.1	HTX-1	HTX-11	HTX-100
HT-0-2	1.8	1.8	0.95	0.7	0.8~1.1	1.1	HTX-1	HTX-11	∕
HT-0-3	1.8	2.0	0.95	0.7	1.0~1.2	1.1	HTX-1	HTX-11	∕
HT-0-4	1.8	2.2	0.95	0.7	1.2~1.6	1.1	HTX-1	HTX-11	∕
HT-0-5	1.8	2.6	0.95	0.7	1.6~1.8	1.1	HTX-1	HTX-11	∕
HT-0-6	1.8	3.0	0.95	0.7	2.0~2.2	1.1	HTX-1	HTX-11	∕
HT-1-1	1.9	2.6	0.95	0.65	1.6~1.8	1.1	HTX-1	HTX-11	∕
HT-1-2	2.0	2.6	1.15	0.85	1.6~1.8	1.3	HTX-2	HTX-12	∕
HT-1-3	2.0	2.5	1.3	0.95	1.6~1.8	1.4	HTX-3	HTX-12	∕
HT-1-4	3.0	2.5	1.6	1.2	1.6~1.8	1.7	HTX-4	HTX-13	∕
HT-1-5	3.3	2.5	2.0	1.7	1.6~1.8	2.1	HTX-5	HTX-13	∕
HT-1-6	3.8	2.5	2.5	2.15	1.6~1.8	2.6	HTX-6	HTX-14	∕
HT-2-1	1.9	3.0	0.95	0.65	2.0~2.2	1.1	HTX-1	HTX-11	∕
HT-2-2	2.0	3.0	1.15	0.85	2.0~2.2	1.3	HTX-2	HTX-12	∕
HT-2-3	2.0	3.0	1.3	0.95	2.0~2.2	1.4	HTX-3	HTX-12	∕
HT-2-4	3.0	3.0	1.6	1.2	2.0~2.2	1.7	HTX-4	HTX-13	∕
HT-2-5	3.3	3.0	2.0	1.7	2.0~2.2	2.1	HTX-5	HTX-13	∕
HT-2-6	3.8	3.0	2.5	2.15	2.0~2.2	2.6	HTX-6	HTX-14	∕
HT-3-1	2.0	4.2	1.15	0.8	3.2~3.4	1.3	HTX-2	HTX-12	∕

* All of the caulking tools A, B and C are necessary.

Caulking tool for grommet [HTX series]


- This is a caulking tool for the HT series.



HTX-1 to 6



HTX-11 to 14

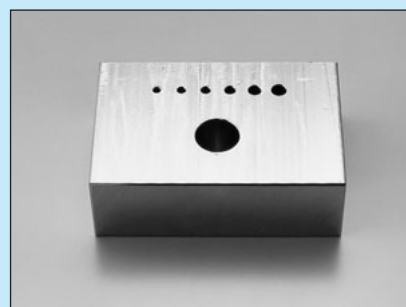

HTX-100

How to use

