


Grommet

HT series (1000pcs/pack)

- This is used for repairing a PC board, etc.
- This can be also used for overlaying many thin thickness boards with such as flexible board, etc.
- Material: Brass
- Finish: Gold plating over nickel base



| Part No. | A | B | C | D | Adaptive printed board thickness | Printed board fitting hole diameter | Caulking tool A | Caulking tool B | Caulking tool C |
|----------|-----|-----|------|------|----------------------------------|-------------------------------------|-----------------|-----------------|-----------------|
| HT-0-1 | 1.8 | 1.3 | 0.95 | 0.7 | 0.3 to 0.7 | φ 1.1 | HTX-1 | HTX-11 | HTX-100 |
| HT-0-2 | 1.8 | 1.8 | 0.95 | 0.7 | 0.8 to 1.1 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-0-3 | 1.8 | 2.0 | 0.95 | 0.7 | 1.0 to 1.2 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-0-4 | 1.8 | 2.2 | 0.95 | 0.7 | 1.2 to 1.6 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-0-5 | 1.8 | 2.6 | 0.95 | 0.7 | 1.6 to 1.8 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-0-6 | 1.8 | 3.0 | 0.95 | 0.7 | 2.0 to 2.2 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-1-1 | 1.9 | 2.6 | 0.95 | 0.65 | 1.6 to 1.8 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-1-2 | 2.0 | 2.6 | 1.15 | 0.85 | 1.6 to 1.8 | φ 1.3 | HTX-2 | HTX-12 | |
| HT-1-3 | 2.0 | 2.5 | 1.3 | 0.95 | 1.6 to 1.8 | φ 1.4 | HTX-3 | HTX-12 | |
| HT-1-4 | 3.0 | 2.5 | 1.6 | 1.2 | 1.6 to 1.8 | φ 1.7 | HTX-4 | HTX-13 | |
| HT-1-5 | 3.3 | 2.5 | 2.0 | 1.7 | 1.6 to 1.8 | φ 2.1 | HTX-5 | HTX-13 | |
| HT-1-6 | 3.8 | 2.5 | 2.5 | 2.15 | 1.6 to 1.8 | φ 2.6 | HTX-6 | HTX-14 | |
| HT-2-1 | 1.9 | 3.0 | 0.95 | 0.65 | 2.0 to 2.2 | φ 1.1 | HTX-1 | HTX-11 | |
| HT-2-2 | 2.0 | 3.0 | 1.15 | 0.85 | 2.0 to 2.2 | φ 1.3 | HTX-2 | HTX-12 | |
| HT-2-3 | 2.0 | 3.0 | 1.3 | 0.95 | 2.0 to 2.2 | φ 1.4 | HTX-3 | HTX-12 | |
| HT-2-4 | 3.0 | 3.0 | 1.6 | 1.2 | 2.0 to 2.2 | φ 1.7 | HTX-4 | HTX-13 | |
| HT-2-5 | 3.3 | 3.0 | 2.0 | 1.7 | 2.0 to 2.2 | φ 2.1 | HTX-5 | HTX-13 | |
| HT-2-6 | 3.8 | 3.0 | 2.5 | 2.15 | 2.0 to 2.2 | φ 2.6 | HTX-6 | HTX-14 | |
| HT-3-1 | 2.0 | 4.2 | 1.15 | 0.8 | 3.2 to 3.4 | φ 1.3 | HTX-2 | HTX-12 | |

* All of the caulking tools A, B and C are necessary.

Caulking tool for grommet

HTX series

Tool


- This is a caulking tool for the HT series.



HTX-1 to HTX-6



HTX-11 to HTX-14

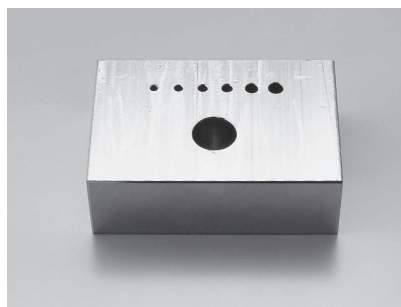

HTX-100

■ How to use

