



**Male pin for HH-20**

**OJ series (100pcs/pack)**

- This male pin is for HH-20 series connector which is connected with a pitch of 2.54mm.
- For using please insert the OJ series into housing (OH series).
- OJ series Material: Brass  
Finish: Gold plating over nickel base

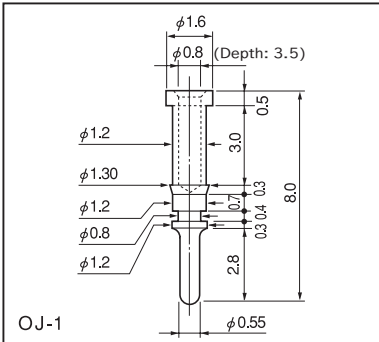


For horizontal fitting

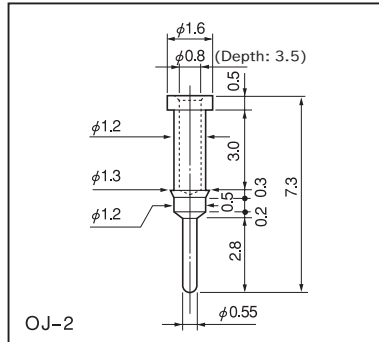

For vertical fitting



**Example of usage Horizontal fitting**

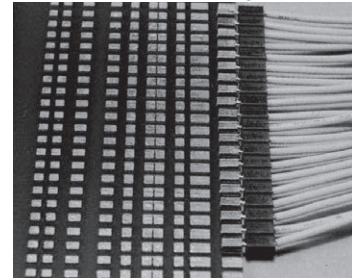


**Part No.**

Part No.	Fitting method	Crimping tool
OJ-1	Horizontal	OMXT-1
OJ-2	Vertical	OMXT-1


**How to use**




Crimp the electric wire to OJ series by using the crimping tool OMXT-1.



Press-fit OJ series pin to the housing (OH series) by using the tool OMXT-3, OMXT-2 (OJ-2), or OMXT-4 (OJ-1).



The finished state of the male pin

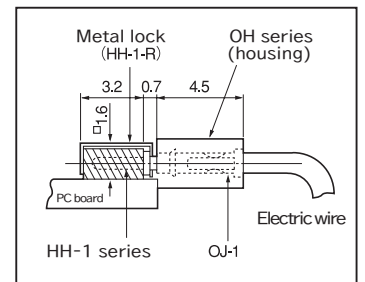

It will not be taken off if the metal lock (HH-1-R) is used.


**Housing**

**OH series (100pcs/pack)**


- This housing is used for fixing OJ series.
- The tool to press-fit to the housing is OMXT-3, OMXT-2 (OJ-2) or OMXT-4 (OJ-1).

**Specification**

Material	PBT resin (UL94V-0)
Color	Black
Temperature range	- 40 to + 125°C
Number of pins	Maximum number: 20P
First indication	White marking

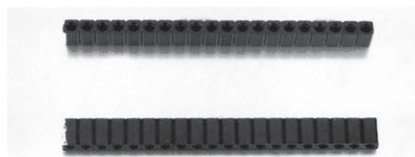

**Dimension**

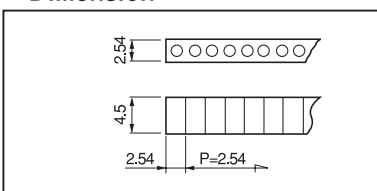

**How to order**

OH-3



Please fill in the desired number of poles. (Maximum number. 20P)